


Open the filters.



Open the panel, there is a screw to open the light front panel




Unplug the light connection

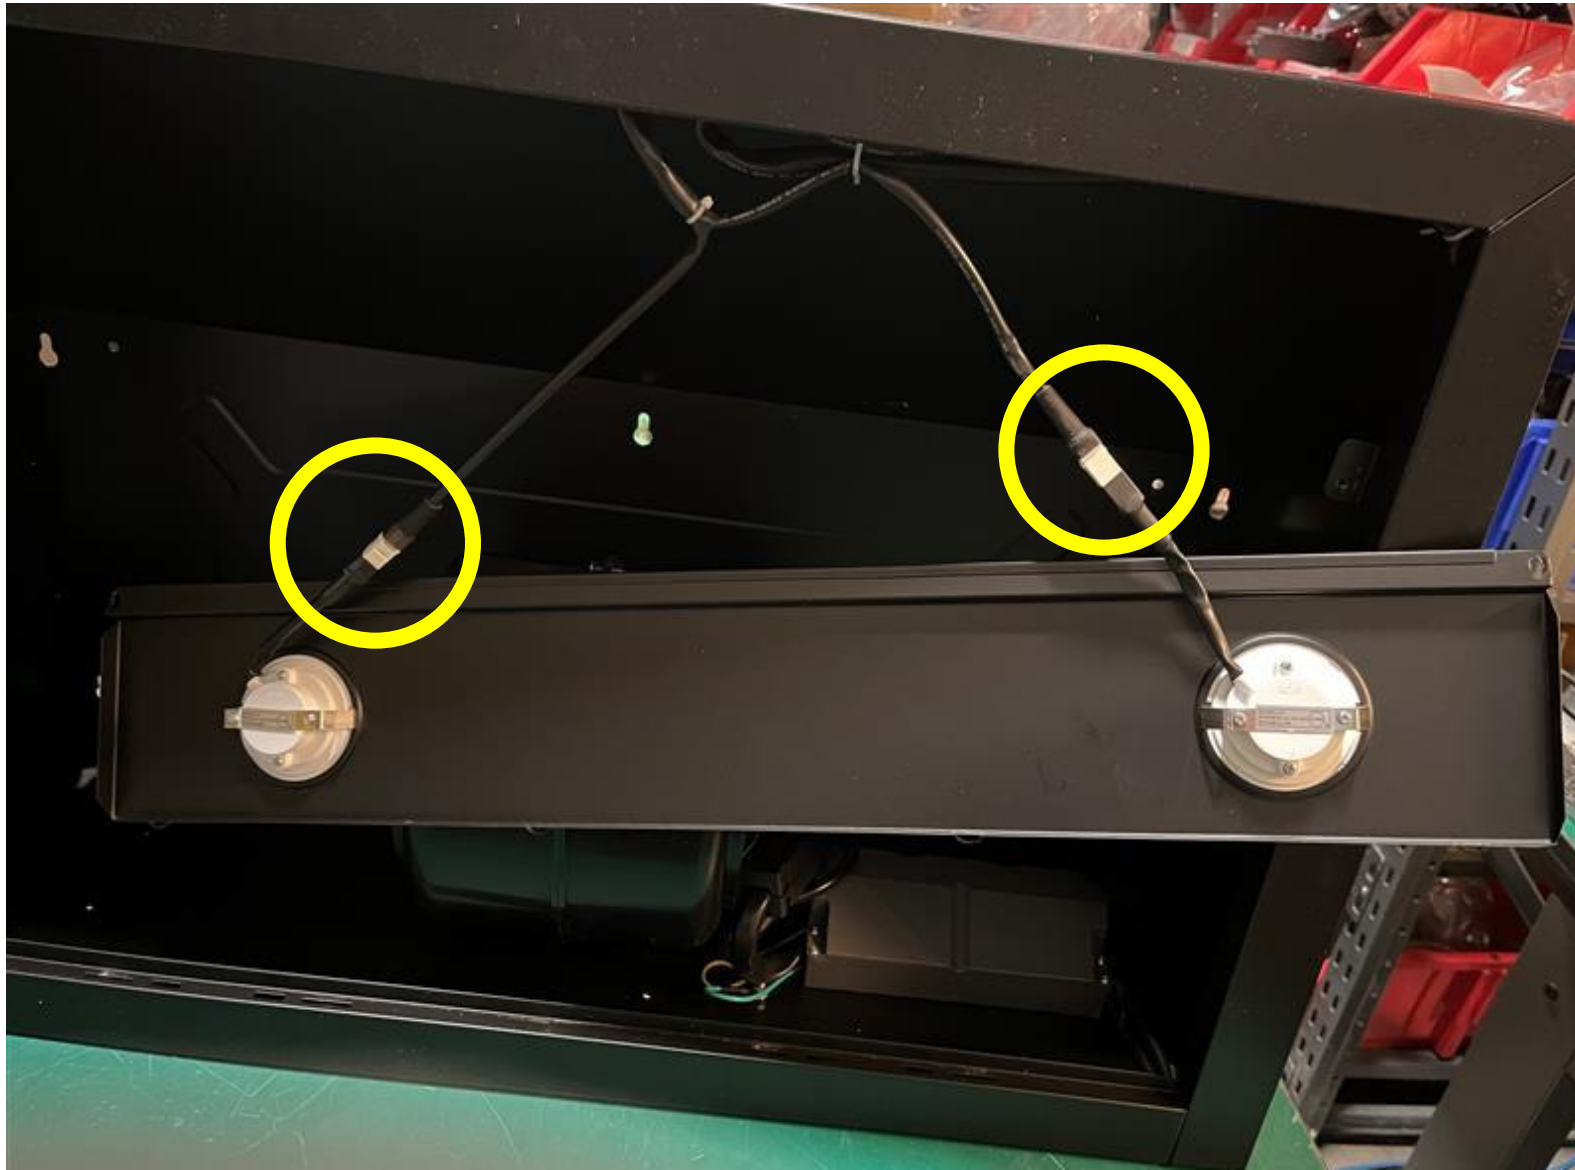


After unplugging the lights, take out the control panel, there are two screws both side



Open the PCB box

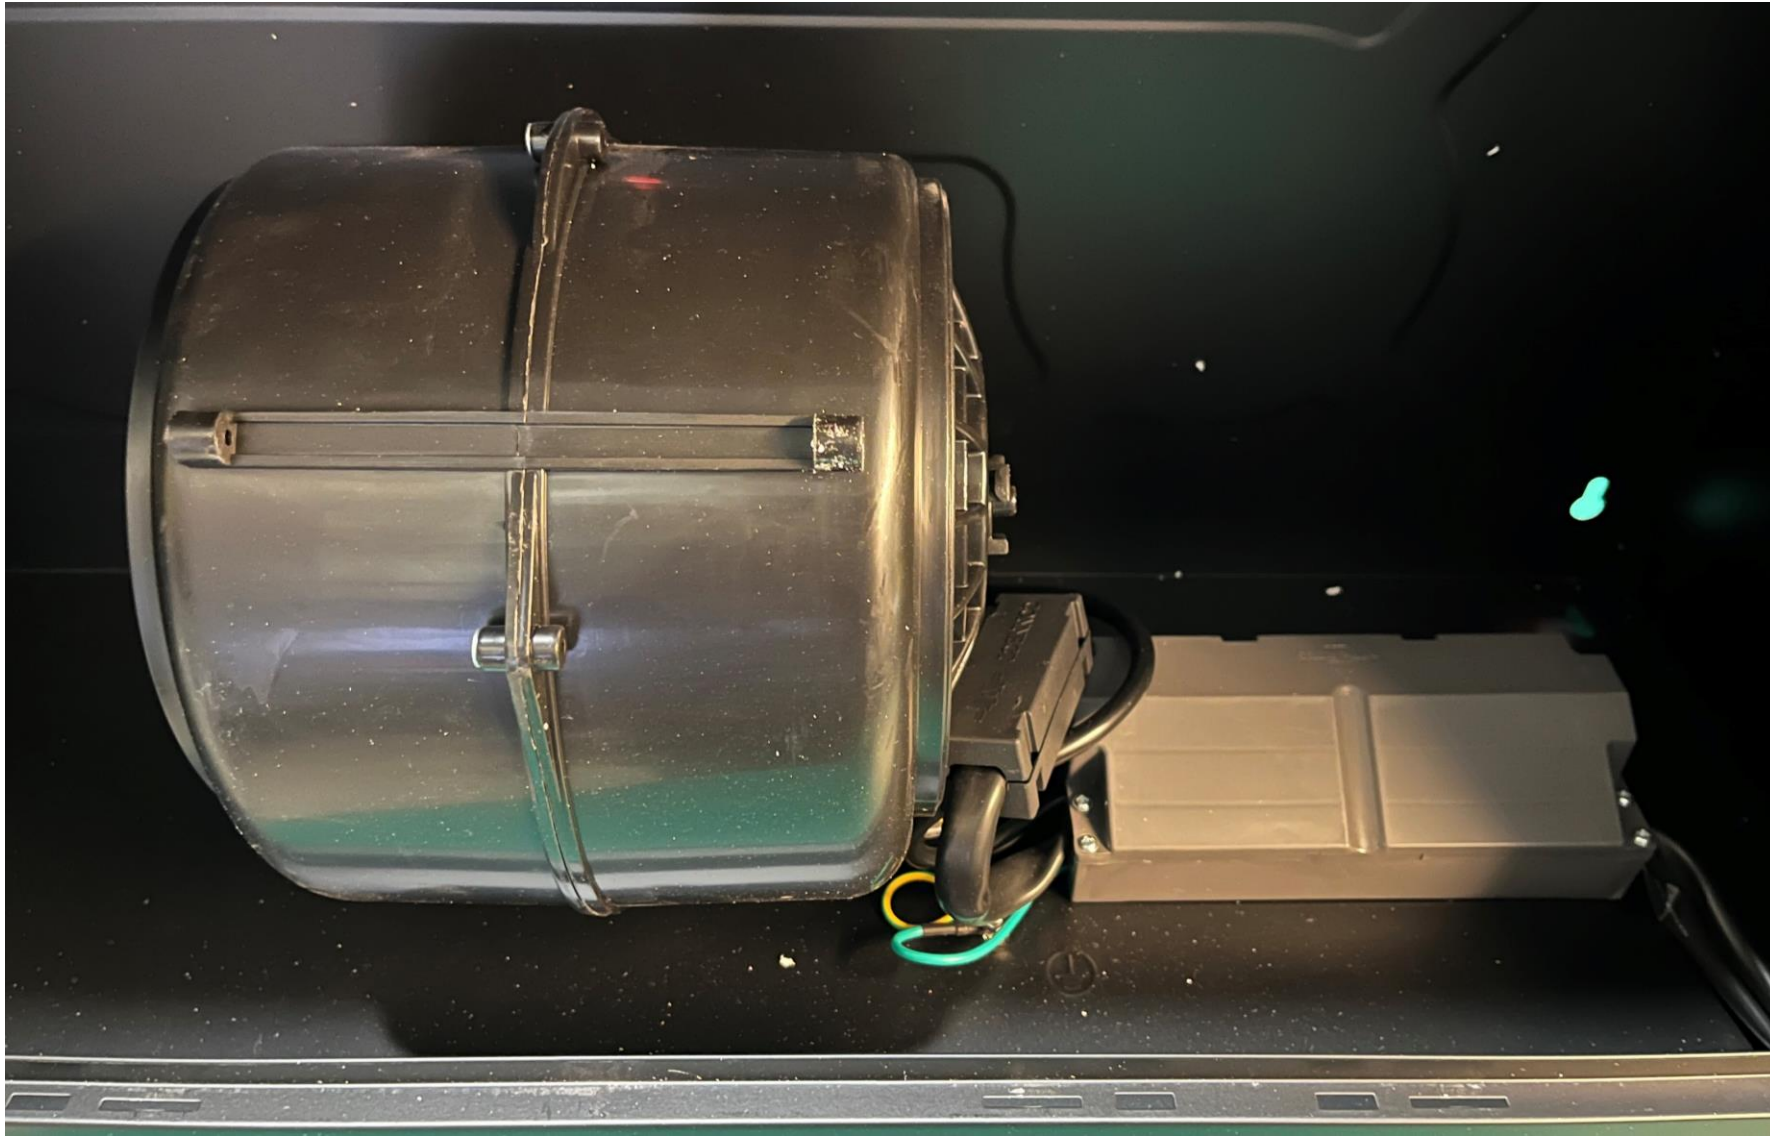

To open the box, there are 6 screws, left side 3 and right side 3

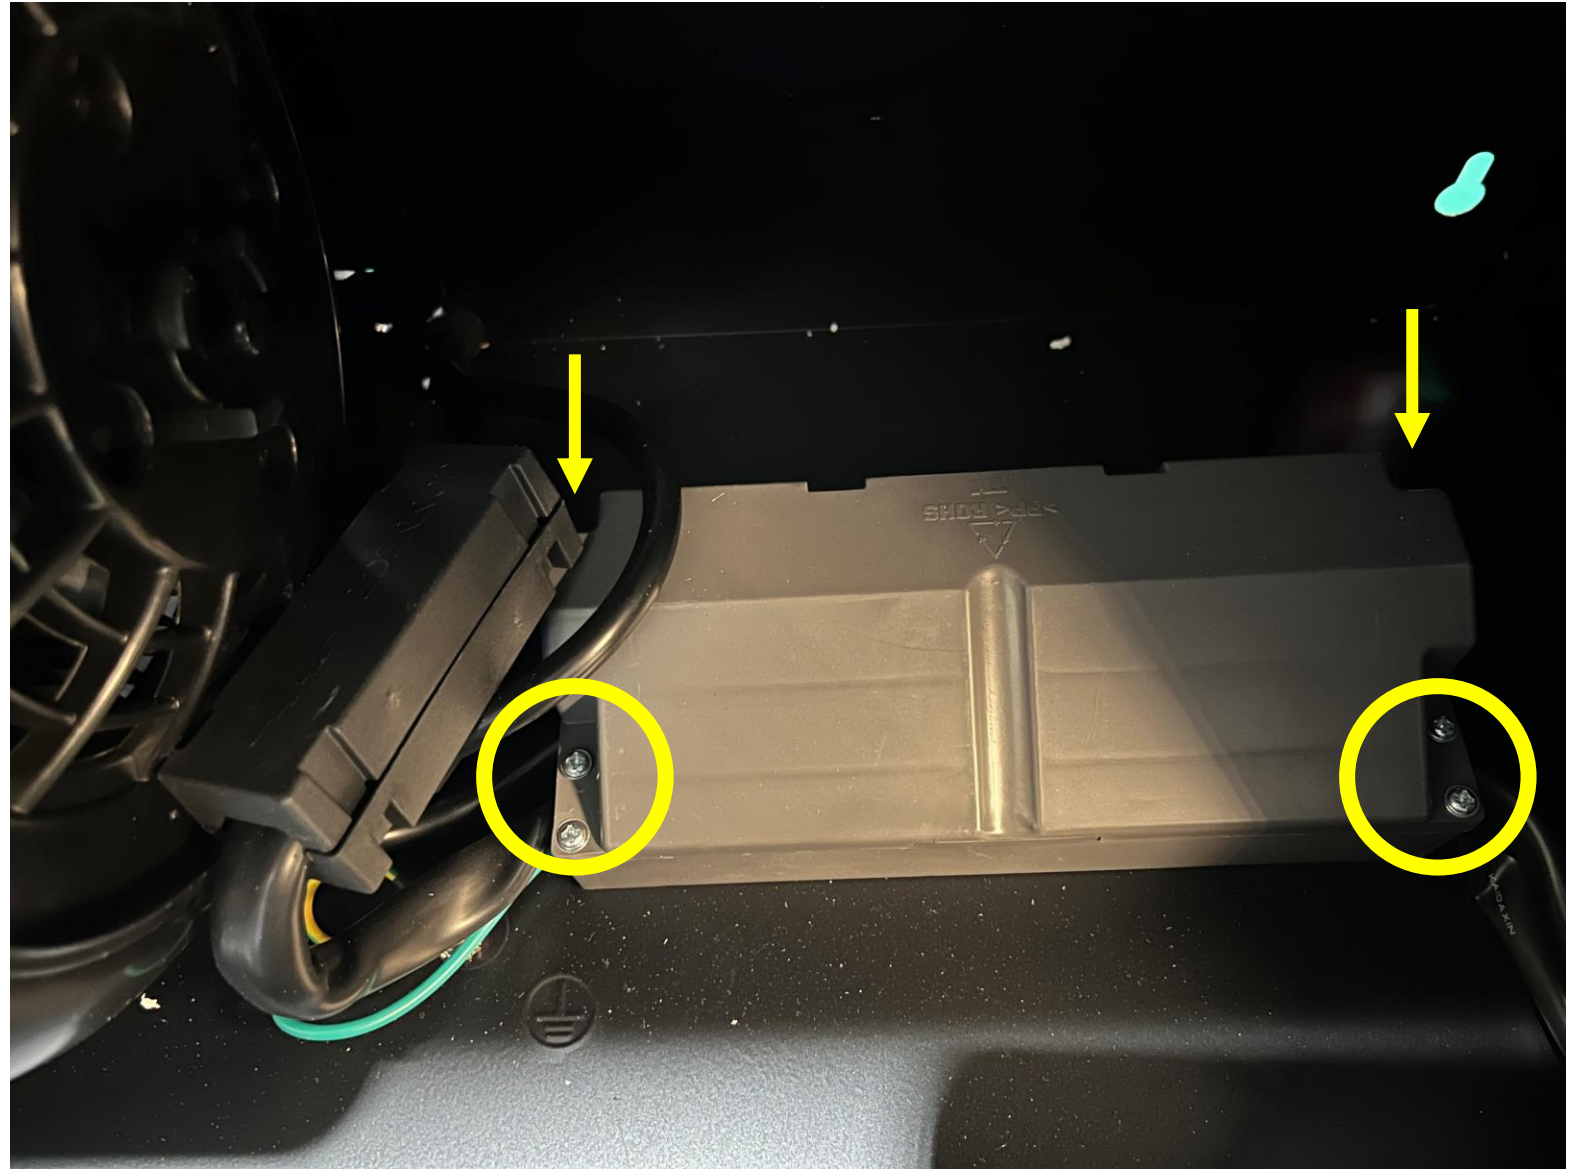

Unplug the control panel connector in the middle

