

# Maintenance

## Replacing the Light Bulbs

This range hood uses halogen bulbs: 35W 120V Type MR16 GU10.



### IMPORTANT:

**ALWAYS SWITCH OFF THE ELECTRICITY SUPPLY AT THE MAIN PANEL BEFORE CARRYING OUT ANY OPERATION ON THE APPLIANCE.**

- 1** Make sure the electrical power to the range hood is turned off. Please note that the light bulbs may be hot. Allow enough time to let the light bulbs cool off before attempting to change them.
- 2** Attach the black rubber suction piece, included with your range hood, to the outside glass part of the bulb. Press the bulb inwards. **DO NOT** push too hard as bulb “legs” may break off. (See Figure #1)
- 3** Turn the bulb counter-clockwise as you continue to press inward. Release your pressure on the lamp when it won't turn any farther. Gently pull the bulb straight out of the socket. You may need to wiggle it gently to get the cylindrical “feet” aligned correctly with the larger openings in the socket. (See Figure #2)
- 4** Discard the old bulb. Line the prongs on the new bulb up with the wide openings on the socket. Press inward on the edges of the new lamp with your thumbs and twist the lamp clockwise as far as it will go.
- 5** Turn the electricity and range hood on and test for operation.

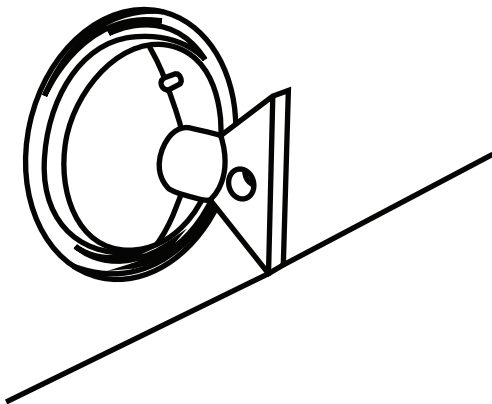


Figure #1

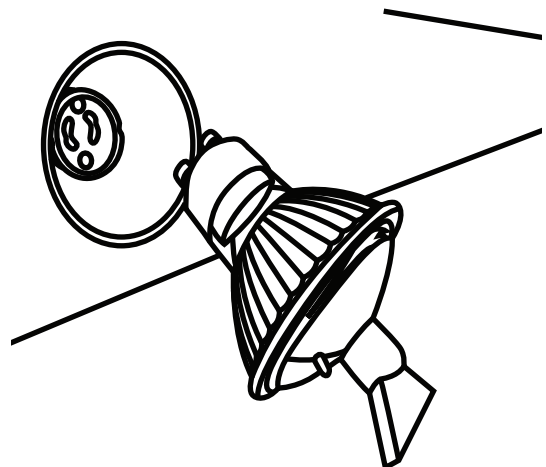


Figure #2