

## REPLACING THE BULBS:

**Step 1: Important! Turn off the power off to your range hood.**

**Step 2:** Line up the arrow on the metal ring around the edge of the bulb with the arrow on the range hood. (See Fig. # 1)

**Step 3:** Turn the ring counter- clockwise until the little hooks on the metal ring are unlocked and remove the metal ring and bulb. You can use a flat-head screw driver to remove. (See Fig. # 2)

**Step 4:** The spring will cause the light base will pop out. Gently push down and turn the light bulb counter-clockwise to remove from light base. (See Fig. #3)

**Step 5:** Insert the new light bulb into the holes of the base and turn clockwise until secure.

**Step 6:** Put the light bulb and base back up into the light opening on the range hood, making sure that the spring and metal ring are in place.

**Step 7:** Line up the arrows again and turn the metal ring and light bulb clockwise until the little hooks on the metal ring are relocked into position. (See Fig. # 4)

**Step 8:** Turn the power to your range hood back on and test the lights.

Fig. #1

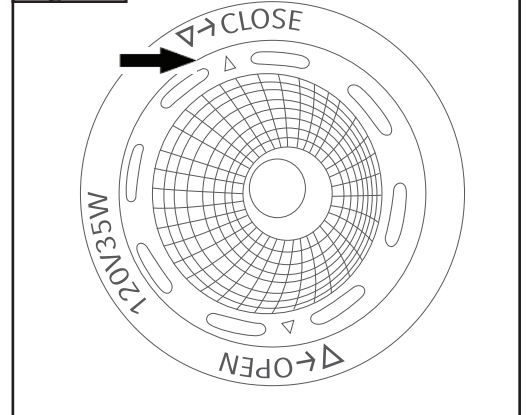


Fig. #2

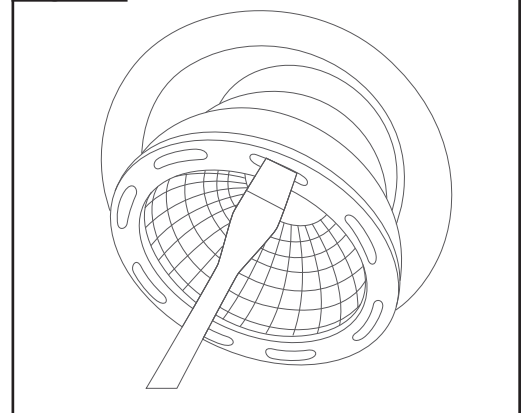


Fig. #3

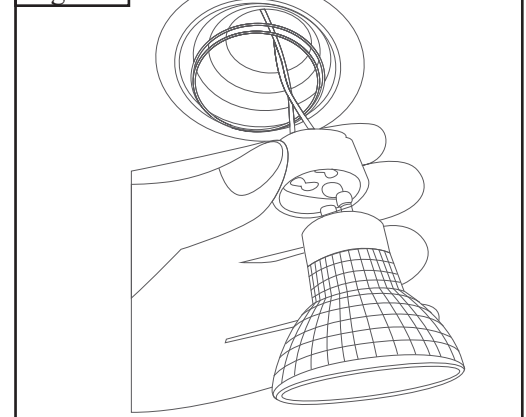


Fig. #4

